

LPC-FG conduit

White, Blue or Grey Reinforced uPVC with PVC Jacket

Construction: Smooth bore, smooth cover, helically formed PVC, flexible conduit with spiral uPVC reinforcement and flexible PVC jacket. Colour white, blue or grey available.

Typical Applications: Suitable for repeat contact with all food types, excluding fatty foods, at full temperature.

The flexible PVC is manufactured from FDA approved ingredients and has been independently tested to European Food regulation 10/2011.



Nominal size (mm)	ID (mm)	OD (mm)	Reel Length (m)	Conduit Part No. White	Conduit Part No. Blue	Conduit Part No. Grey
16	12.6	17.8	30	LPCWFG16	LPCBUFG16	LPCGFG16
20	16.0	21.1	10, 30	LPCWFG20	LPCBUFG20	LPCGFG20
25	21.0	26.4	10, 30	LPCWFG25	LPCBUFG25	LPCGFG25
32	26.5	33.1	10, 30	LPCWFG32	LPCBUFG32	LPCGFG32
40	35.4	41.8	10, 30	LPCWFG40	LPCBUFG40	LPCGFG40
50	40.0	47.9	10, 30	LPCWFG50	LPCBUFG50	LPCGFG50
63	51.3	59.7	10, 30	LPCWFG63	LPCBUFG63	LPCGFG63

LPC-C-FG fitting

Multiflex Consulting ApS

Metric threads

tf.: 5332 7083

Multipart compression fitting designed using principles given in EN1672-2 and EN ISO 14159. Manufactured from 316L Stainless Steel, complete with polyester elastomer compression seals to prevent ingress of food or bacteria. Can be used for knockout or threaded entries as fitting rotates until tightened.



Fitting Part No.	Thread Size
LPC16-M16-C-FG	M16
LPC20-M20-C-FG	M20
LPC25-M25-C-FG	M25
LPC32-M32-C-FG	M32
LPC40-M40-C-FG	M40
LPC50-M50-C-FG	M50
LPC63-M63-C-FG	M63

Metallic Systems

LTP-FG conduit

Galvanised Steel with White or Blue PVC Cover

Construction: Galvanised steel, helically wound, flexible conduit with smooth white or blue PVC cover.

Typical Applications: Suitable for repeat contact with all food types, excluding fatty foods, at full temperature.

The flexible PVC is manufactured from FDA approved ingredients and has been independently tested to European Food regulation 10/2011.




Nominal size (mm)	ID (mm)	OD (mm)	Conduit Part No. White	Reel Length (m)	Conduit Part No. Blue	Reel Length (m)
16	12.6	17.8	LTPWFG16	25	LTPBUFG16	25
20	16.0	21.1	LTPWFG20	10, 25	LTPBUFG20	10, 25
25	21.0	26.4	LTPWFG25	10, 25	LTPBUFG25	10, 25
32	26.5	33.1	LTPWFG32	10, 25	LTPBUFG32	10, 25
40	35.4	41.8	LTPWFG40	10	LTPBUFG40	10
50	40.0	47.9	LTPWFG50	10	LTPBUFG50	10
63	51.3	59.7	LTPWFG63	10	LTPBUFG63	10

LTBRDP-FG conduit

Galvanised Steel Core & Braid with a White or Blue PVC Cover

Construction: Galvanised steel, helically wound, flexible conduit with galvanised steel braid and a white or blue PVC smooth cover.

Typical Applications: Suitable for applications where high corrosion resistance and liquid tight are a requirement combined with EMC screening. The flexible PVC is manufactured from FDA approved ingredients and has been independently tested to European Food regulation 10/2011.

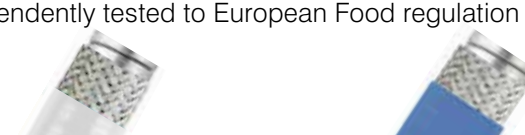

Conduit Part No. White	Reel Length (m)	Conduit Part No. Blue	Reel Length (m)
LTBRDPWFG20	10, 25	LTBRDPBUFG20	10, 25
LTBRDPWFG25	10, 25	LTBRDPBUFG25	10, 25
LTBRDPWFG32	10, 25	LTBRDPBUFG32	10, 25
LTBRDPWFG40	10	LTBRDPBUFG40	10
LTBRDPWFG50	10	LTBRDPBUFG50	10